
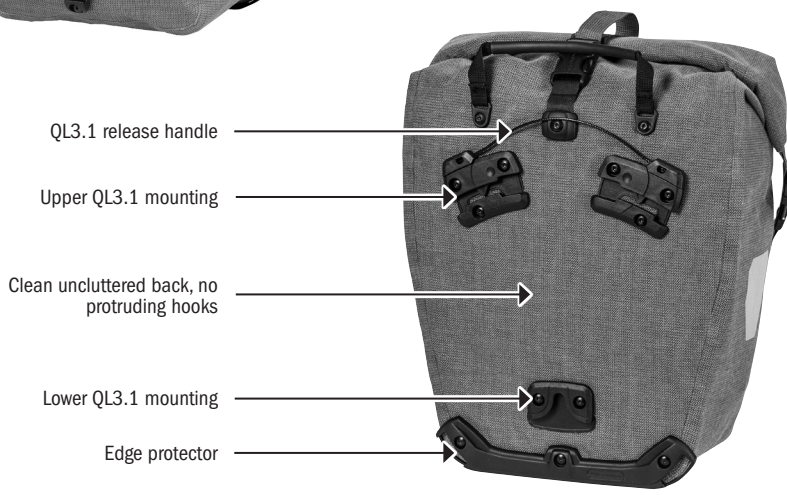


# PRODUCT INFO

## BACK-ROLLER URBAN (SINGLE BAG)

Rear pannier with roll closure and QL3.1 system

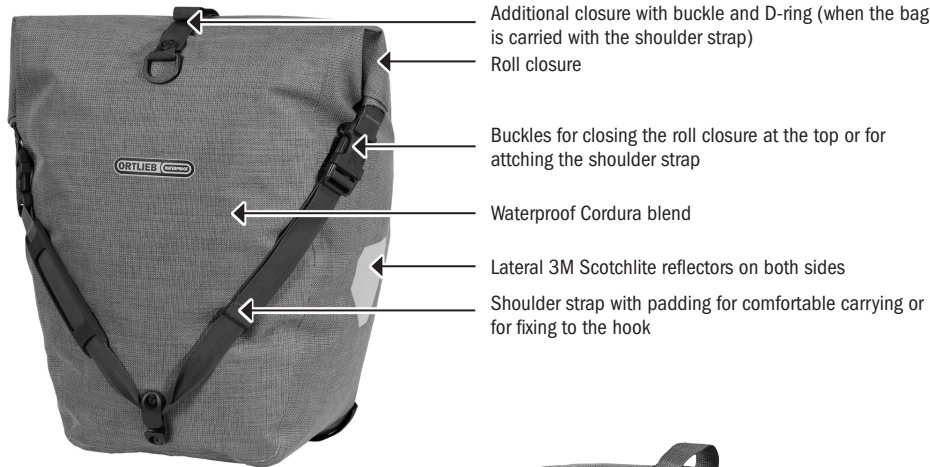

| height cm/in | width cm/in | depth cm/in | volume L/cu.in. | weight g/oz | max. capacity kg/lbs. |
|--------------|-------------|-------------|-----------------|-------------|-----------------------|
| 42           | 23/32       | 17          | 20              | 820/28.9    | 9/19.8                |

### SPECIFICATIONS:

- + Classical rear pannier (single) with roll closure
- + With QL3.1 mounting system
- + Ideal for work, university or school
- + Sturdy soft-touch PU-laminated Cordura blend
- + QL3.1 studs are mounted directly on the luggage carrier prepared for QL3.1
- + QL3.1 mounting kit (not included) as an optional accessory for carriers without QL3.1 preparation
- + Single handed mounting and release of bag
- + Flat mounting elements ensure smooth uncluttered back of bag
- + Height and inclination of bag can be adjusted individually
- + Lower hook rotatable of mounting set
- + Integrated inner pocket
- + Can be easily cleaned inside
- + Removable shoulder strap
- + Two highly reflective 3M Scotchlite reflectors

**Contents:** QL3.1 pannier comes with shoulder strap and QL3.1 studs

**Optional accessories:** QL3.1 mounting brackets for racks with diameter 11 to 16 mm, QL3.1 mounting set, Outer Pocket 2,1 L, Mesh-Pocket, Bottle Cage

**Attention:** Maximum load per pannier is 9kg / 20 lbs. We recommend weighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: The maximum weight capacity of every carrier model is different. Please observe the maximum weight allowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DO NOT exceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

**Attention:** As abrasion cannot be ruled out, we recommend that all points where the mounting system contacts the bicycle rack or frame be protected by scratch protection film.

**Note:** For reaching protection standard IP64 (6=dustproof, 4=protected against splash water coming from all directions) the roll closure must be rolled 3-4 times and fixed downwards.