

# PRODUCT INFO




## VARIO QL3.1


Backpack with QL3.1 rack mounting




Test result Tipp Allrounder, for modell with QL3, German magazin RADtouren, 3/2015

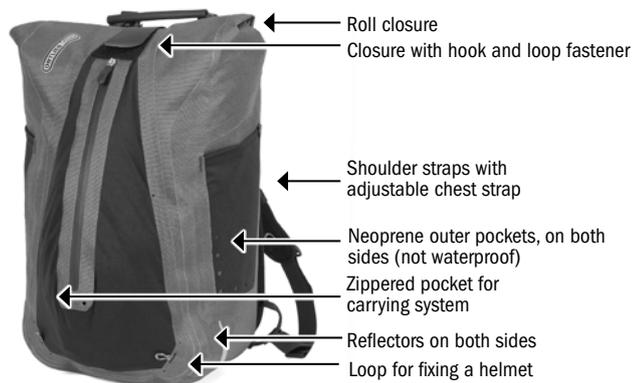

Application: carrying system mounted

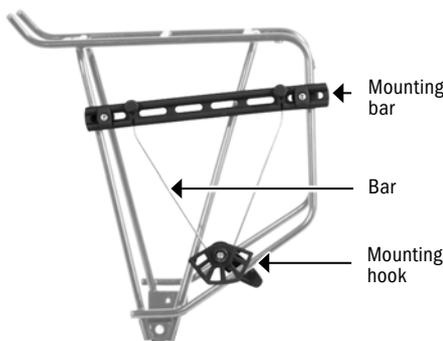

QL3/QL3.1 mounting components (incl.)

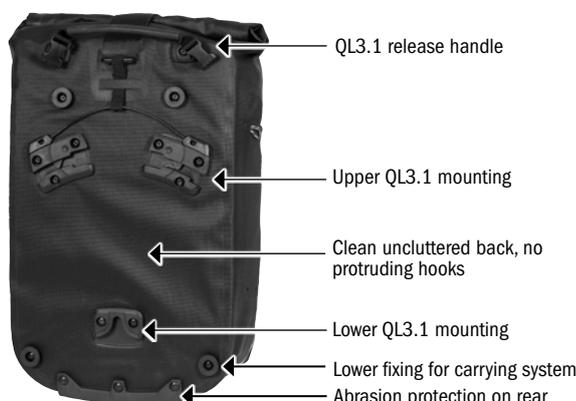

Application: pack for mounting to rack, carrying system demounted

height cm/in.	width cm/in.	depth cm/in.	vol. L/cu.in	weight g/oz.
50/19.7	28/11	20/7.9	23/1403	1370/48.3

## SPECIFICATIONS:

- + Waterproof backpack with roll closure and Quick-Lock3.1 mounting system
- + Application as pannier and backpack
- + Tear and abrasion resistant nylon fabric
- + Padded carrying system with chest and waist strap can be stowed away in the zippered front pocket
- + Quick and simple fixing of carrying system to rear of bag
- + Clean uncluttered back of bag
- + Mounting compatible with racks up to 10 mm tube diameter (series version)
- + Optionally available are QL3.1 clamps for 11-14 mm tube diameter (art. code E190)
- + 2 lateral neoprene outer pockets (not waterproof)
- + Integrated fixing for bike helmet
- + Size fits DIN A4 documents and 15,4" notebooks
- + Inner pocket
- + 2 reflectors

**Contents:** Backpack comes with QL3.1 mounting system, helmet fixing

**Optional accessories:** QL3.1 mounting set for second bike (art. code E201), QL3.1 mounting clamps 11-14 mm (art. code E190)

**Attention:** Maximum load per pannier is 9kg / 20 lbs. We recommend weighing each loaded pannier to confirm that the maximum allowance of the pannier fixation is not exceeded. This practice is advised for both rear and front panniers. CAUTION: The maximum weight capacity of every carrier model is different. Please observe the maximum weight allowance of the carrier fitted to your bicycle. Note: Sometimes the maximum capacity of the panniers fixing system can exceed the maximum capacity of the carrier. DO NOT exceed the maximum capacity of the carrier! Note, that the use of panniers will significantly influence the handling properties of your bicycle.

**Note:** In order to meet standard IP64 (6=dustproof, 4=protected against splash water coming from all directions) the roll closure must be rolled at least 3-4 times.